



JK-8558G

Power Saving Chain Stitch Machine

Power saving



Auto presser foot lifter




Rear puller



Slant type needle Trigonal type needle

Two needle gauges (JK-8560G)

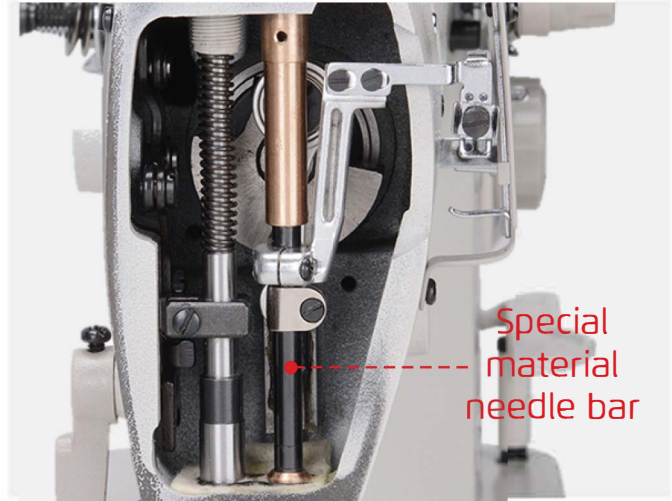

Semi-dry

Model	Needle Array	Needle Gauge	Needle No.	Needle No.	Thread No.	Needle Distance (mm)	Presser Foot Height (mm)	A	M	H	Max. Speed (s-p.m)	Volume (mm)	Weight (kg)
JK-8558G-WZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675x275x595	39/47
JK-8558G-WTZ	Parallel Double Needle	1/4,3/16, 1/8,3/8	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675x275x595	39/47
JK-8558G-1WZ	Single Needle	-	TVx7 14#	1	2	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675x275x595	39/47
JK-8558G-2WZ	Vertical Double Needle	3/16	TVx7 14#	2	4	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675x275x595	39/47
JK-8560G-WZ	Slant Three Needle	1/8	TVx7 14#	3	6	1.4-4	4.5 (knee Control 8-10)	√	√		4000	675x275x595	39/47
JK-8560G-WZ-PL	Slant Three Needle	1/8	TVx7 18#	3	6	1.4-4	4.5 (knee Control 8-10)		√		4000	675x275x595	39/47
JK-8560G-PHWZ	Trigonal Three Needle	1/8	TVx7 21#	3	6	1.4-4	4.5 (knee Control 8-10)		√	√	4000	675x275x595	39/47

Note: T: auto presser foot lifter, 8558G/8560G: auto presser foot lifter is optional.

PL: rear puller.

PL(X): Rubber puller.



**Not sure which machine is best for you?
Contact us for a free consult. We would love to help.**

SQUARE DEAL SEWING MACHINES CC

190 Voortrekker Rd, Maitland, Cape Town, 7405
TEL: 021 510 5150

E-mail: info@sewingmachine.co.za
www.sewingmachine.co.za